


Canon



WORKGROUP SOLUTIONS



imageRUNNER®
2030i / 2025i

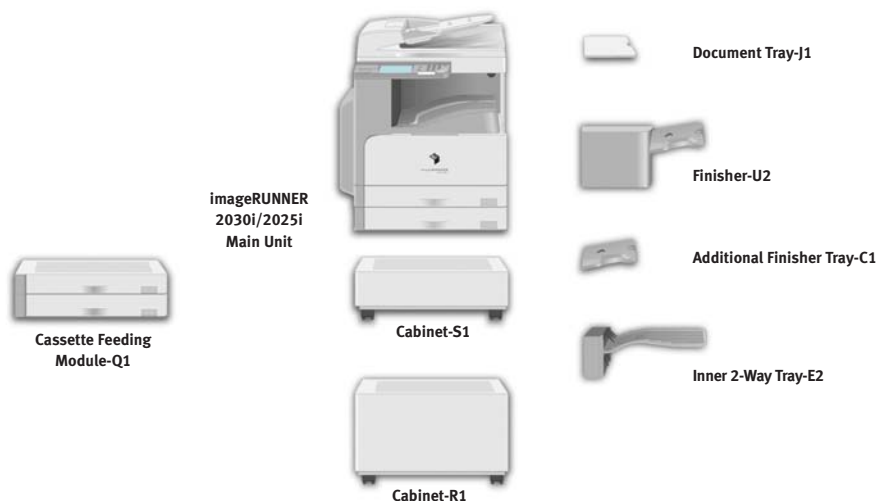

OPTIONAL ACCESSORIES

Cassette Feeding Module-Q1

Paper Capacity:	2 x 250-Sheet Cassette
Acceptable Paper Size:	11 x 17", Legal, Letter Letter-R, Statement
Acceptable Paper Weight:	17 lb. to 24 lb. Bond
Dimensions (H x W x D):	8" x 22-7/8" x 22-3/8"
Weight:	Approx. 26.5 lb. (12kg)

Inner 2-Way Tray-E2

Number of Trays:	Two
Acceptable Paper Size:	Statement to 11" x 17"
Tray Capacity	
Upper Output Tray:	100 Sheets (Letter) 50 Sheets (Other Sizes)
Lower Output Tray:	250 Sheets (Letter) 100 Sheets (Other Sizes)
Dimensions (H x W x D) (Inside Main Unit):	6" x 19-1/8" x 17-3/4"
Weight:	Approx. 33 lb. (1.5kg)

Finisher-U2

Number of Trays:	One (Second Tray Optional)
Tray Capacity	
Single Tray:	770 Sheets (Letter, Statement-R) 380 Sheets (Legal, Letter-R, 11" x 17")
With Additional Finisher Tray-C1:	200 Sheets Each Tray (Letter, Statement-R) 150 Sheets Each Tray (Legal, Letter-R, 11" x 17")
Staple Position/Size	
Top Left Corner:	11" x 17" (Landscape), Legal (Landscape), Letter, Letter-R
Top Right Corner:	11" x 17" (Portrait), Legal (Portrait)

imageRUNNER
2030i/2025i
Main Unit

Cabinet-S1

Cabinet-R1

Document Tray-J1

Finisher-U2

Additional Finisher Tray-C1

Inner 2-Way Tray-E2

Max. Stapling Capacity:	Up to 30 Sheets (All Sizes)
Dimensions (H x W x D) (Inside Main Unit):	11-7/8" x 18-7/8" x 20-1/2"
Weight:	Approx. 22 lb. (10kg)
Attachable Accessories:	Optional Additional Finisher Tray-C1

Additional Finisher Tray-C1 (Optional for Finisher-U2)

Tray Capacity:	200 Sheets (Letter, Statement-R) 150 Sheets (Legal, Letter-R, 11" x 17")
Dimensions (H x W x D) (Inside Main Unit):	3-2/5" x 8-1/10" x 15-3/8"
Weight:	Approx. 4 lb. (1.8kg)

Super G3 Fax Board-AA1

Applicable Line:	Public Switched Telephone Network (PSTN) Facsimile Network
Connection Lines:	One
Address Book:	500 Destinations
Sending Original Sizes:	Statement to 11" x 17"
Recording Printing Sizes:	Statement to 11" x 17"
Transmission Time***	
ECM-MMR:	Approx. 3.2 Seconds/Page (33.6 Kbps)
GRMR Method:	Approx. 13 Seconds/Page (33.6 Kbps)
GRMH Method:	Approx. 13 Seconds/Page (33.6 Kbps)
JBIG:	Approx. 2.6 Seconds/Page (33.6 Kbps)

Scan Line Density	
Standard:	8 Pels/mm x 3.85 Lines/mm
Fine:	8 Pels/mm x 7.7 Lines/mm
Super Fine:	8 Pels/mm x 15.4 Lines/mm
Ultra Fine:	16 Pels/mm x 15.4 Lines/mm
Image Memory:	Approx. 1,000 Pages

Additional Supplies and Accessories

Basic Card Set
Braille Label Lit-A1
Cabinet-R1 (Large)
Cabinet-S1 (Small)
Card Reader Attachment-D1
Card Reader-E1
Copy Card Sets
Document Tray-J1
Power Supply Kit-Q1
Barcode Printing Kit-B1
FL Cassette-AF1
Stamp Ink Cartridge-C1
Staple Cartridge-J1
GPR-18 Black Toner

* At room temperature of 20°C/68°F.

** UFR II LT only.

*** Approximately 3-second-per-page fax transmission time based on ITU-T No. 1 Chart (JBIG, Standard Mode) at 33.6 Kbps modem speed when transmitting to another v.34 machine. The Public Switched Telephone Network (PSTN) currently supports 28.8 Kbps modem speeds or lower, depending on telephone line conditions.

Canon
*image*ANYWARE

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Novell and NetWare are registered trademarks of Novell, Inc. in the United States and other countries. Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries. Apple and Macintosh are trademarks of Apple Computer, Inc. CANON, IMAGERUNNER, and the SUPER G3 and the Genuine logos are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEANYWARE is a trademark of Canon. All referenced product names and other marks are trademarks of their respective owners.

Specifications and availability subject to change without notice.
©2007 Canon U.S.A., Inc. All rights reserved.

1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042

